


品质源于自然
QUALITY COMES
FROM NATURE



ALL-IN-ONE SOLUTION
FOR WOOD PLASTIC / COMPOSITES

 **EcoDome**[®]

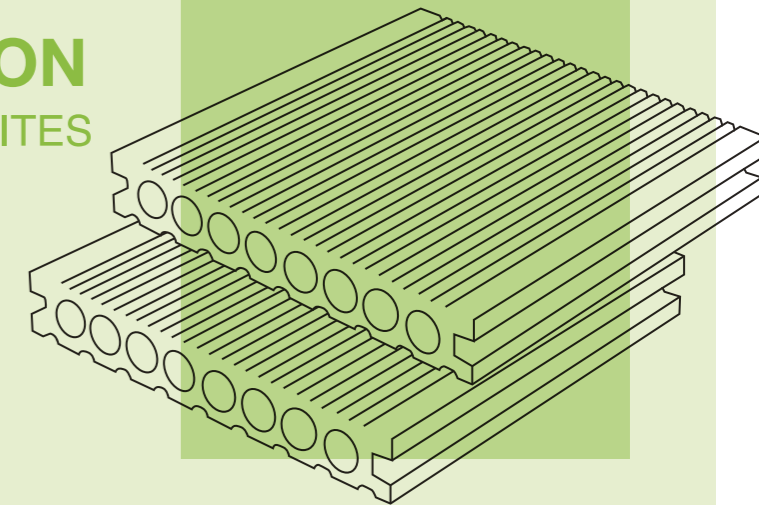

Dabaichuan (Qingdao) Technology Development Co., Ltd.
Shandong Ecodome Building Materials Technology Co., Ltd.

Address: Building A, Weilan Innovation Industrial Park, No. 506, Huicheng Road, Chengyang District, Qingdao City, Shandong Province
Post code: 266114

Tel: +86 0532-86886866 Fax: +86 0532-86886866

Phone number: +86 13687695993 ; +86 13791993067

WeChat: +86 15854136881

Whatsapp: +86 15854136881 ; +86 13791993067

Email: Bctech532@163.com

公司介绍

ENTRPRISE INTRODUCTION



公司坚持绿色生产和科学质量管理, 通过了ISO9001质量管理及ISO14001环境管理认证, 同时配备了先进的自动化生产系统和全面的检测设备, 对每一个生产流程严控控制, 产品质量符合且全面通过CE、FSC、SGS、INTERTEK等相关权威机构的标准及检测, 得到行业的广泛认可和赞誉。

SUNLIKE adheres to green production and scientific quality management, and has passed ISO9001 Quality Management and ISO14001 Environmental Management certification. Meanwhile, it is equipped with advanced automatic production line and complete testing equipment. Each process is under strict quality control to ensure high and reliable quality, that complies with and fully passed the standards and inspections of authoritative organizations such as CE, FSC, SGS and INTERTEK.

PRODUCT CATALOG



Outdoor Composite Decking / Cladding / Fencing

引领低碳生活, 创造绿色环保的生活环境是我们的目标。我们坚信, 品质成就未来, 专业创新的产品和稳定可靠的品质, 将超出您的期盼, 为您创造价值。

SUNLIKE is devoted to lead a low-carbon and green life environment with our recycled decking products. We believe quality achieves future, professional innovative products and stable high quality will exceed your expectations, make value for you.



品质成就未来



HIGH PERFORMANCE BY SUNLIKE TECHWOOD



随着户外材料的使用环境日益复杂,对材料性能的要求也越来越高,对承载类塑木制品有着更高的力学性能要求,对户外景观装饰类塑木制品也有更高的抗老化防脱色,抗蠕变性能要求。江苏汉泽坚持对产品质量和技术创新的追求,致力于为客户提供户外塑木材料的一体化解决方案。

SUNLIKE introduced the most excellent domestic production equipment and R&D department develops the all-in-one solution for wood plastic composites. The quality inspection of the products can be classified into 4 steps: self-inspections, mutual inspection, spot check and in-process quality control. In additional, WPC boards after production will also go through various sampling to ensure all the products are quality reliable.



GB/T 24508-2009《塑木地板》判定为合格



EU REACH 1907/2006 欧盟不含对人体有害的化学物质指令标准下符合规格。




经检验样品达到GB/T24137-2009《木塑装饰板》中E0级别技术指标要求。



符合RoHS 2011/65/EU修正指令(EU)2015/863对10项有害物质的限值要求。



符合欧标EN15534对于户外塑木铺装材料的相关物理性能要求。

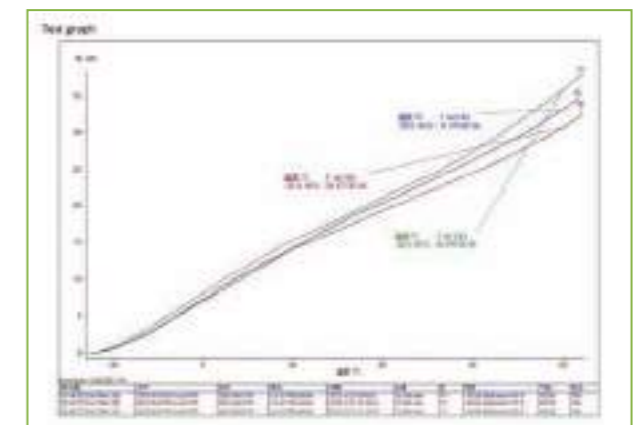

PRODUCT CATEGORY

户外PE塑木产品
一体化方案提供者

ALL-IN-ONE SOLUTION
FOR WOOD
PLASTIC COMPOSITES



低碳环保

Low carbon
environmental protection

防腐防霉

Anticorrosive and
mildew proof

防水防滑

Waterproof and
non-slip

支持定制

Support
customization

不开裂

No cracking

防虫防蛀

Insect-resistant &
moth-proof

经久耐用

Durable

循环利用

Recycling

易安装

Easy to install

二代共挤塑木地板

- 焕彩系列
- 朴雅系列
- 乐致系列

一代塑木地板

立体压纹系列

塑木围栏

塑木栏杆/栅栏

塑木外墙板

塑木长城板

塑木廊架

塑木花箱 / 塑木凉亭

DIY地板

安装说明

CO-EXTRUSION WPC DECKING

- SUN-SHINE SERIES
- SUN-MODEST SERIES
- SUN-EXTEND SERIES

CLASSIC WPC DECKING

3D EMBOSSED WPC DECKING

WPC FENCE

WPC RAILING

WPC WALL PANEL

WPC WALL CLADDING

WPC PERGOLA

WPC FLOWER BOX & WPC PAVILION

DIY WPC TILE

INSTALLATION GUIDE

09

11

13

15

19

21

23

29

31

33

35

37

38

39

二代共挤
塑木地板

CO-EXTRUSION WPC DECKING



(实验数据表明, 共挤木塑的耐磨和抗刮性能比一代塑木增强五倍以上)

共挤塑木地板采用先进的挤出成型技术, 表面均匀而牢固的包覆着共挤层。采用这种新技术生产的共挤塑木, 除了保留传统塑木的防霉防虫和其他物理性能优点外, 还具有更强的耐磨耐刮抗污和耐候性能, 更加美观耐用, 是应用于公园、栈道、海边度假村、水边铺道、甲板、家居户外设施等用途的最佳环保装饰材料。



Co-extrusion WPC has a "cover" that provides added protection against the elements and everyday living while the extruded surface is made of multi engineer plastic with an outer shell of plastic that completely encapsulates the board in an impermeable layer of protection from scratches, stain and fading. Co-extrusion composite decking is the smart way to get a great-looking, long-lasting board. The shield and core are extruded simultaneously, so there are no adhesives or chemicals that are harmful to the environment.

产品特点

FEATURES

纹理逼真, 质感自然, 纹理层次丰富, 凹凸工艺还原实木质感
色泽鲜明多样, 纹理丰富细腻, 取之木, 胜于木
进口高分子保护层, 高强, 抗压, 耐磨, 抗刮, 抗污
双面混色实现了个性化造型, 充分实现了个性化风格

The texture is realistic, the texture is natural, the texture level is rich, and the concave-convex technology restores the solid wood feeling;
Bright and diverse colors, rich and delicate texture, wood is better than wood;
Imported polymer protective layer, high strength, compression resistance, abrasion resistance, scratch resistance and stain resistance;
The double-sided color mixing realizes a personalized shape and fully realizes a personalized style.

焕彩
系列

SUN-SHINE SERIES



焕彩系列用打造艺术品的态度生产每一块地板，产品天然原木般的自然颜色和纹理质感使其区别于市面一般共挤类产品。致力于唤醒人们回归自然的需求，享受更加和谐的户外生活空间。

The natural wood-like natural color and texture of the product make it different from the general coextruded products on the market. It is dedicated to awakening people's need to return to nature and enjoy a more harmonious outdoor living space.



产品特点

FEATURES

焕彩系列产品共挤包覆层厚度1毫米，经表面处理，可媲美实木质感，且表面光滑，无扎手感，适用于别墅、会所等各类高端场所。

The thickness of SUN-SHINE co-extruded layer is about 1mm.

The surface treatment makes the decking more natural than wood, widely used for villas, clubs and other high-end places.

共挤圆孔地板

140*23mm

Co-extrusion Round Hollow Decking



紫檀WN01
Rosewood



柚木TK02
Bright Teak



柚木TK01
Dark Teak



橡木OAK01
Oak



深灰SIO2
Dark Grey



幻灰SIO1
Silver Grey



胡桃RB01
Walnut




古木AT01
Antique

共挤实心地板

Co-extrusion Solid Decking



140*20mm

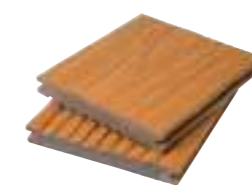

140*20mm




140*25mm



140*30mm

共挤包边条

Co-extrusion Side Cover

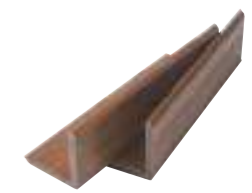

50*50mm


朴雅
系列

SUN-MODEST SERIES



朴雅系列90%原材料为一级再生循环材料，表层由高分子纳米级耐候改性材料360°全覆盖，独有的自清洁表面实现超长抗污，日常只需雨水自然冲刷，表面即可洁净如新，并增强防滑系数，保障复杂环境下的使用安全，适合各类户外工程项目使用。

90% of the raw materials of the Parkia series are first-class recycled materials, and the surface layer is fully covered by polymer nano-level weather-resistant modified materials 360°. The unique self-cleaning surface achieves super-long dirt resistance, and the surface can be clean as new with only natural washing of rainwater on a daily basis, and enhances the anti-slip coefficient to guarantee the safety of use in complex environments, suitable for all kinds of outdoor engineering projects.

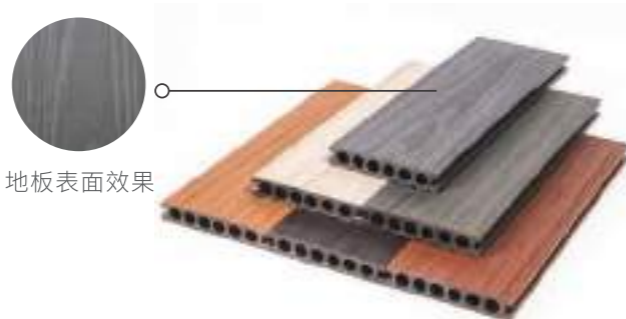

地板表面效果

产品特点

FEATURES

朴雅系列共挤包覆层厚度0.8毫米，表面纹理有树心纹和麻纱纹可选，不做打磨处理，背面带槽+拉丝纹，有一定塑料感，性价比极高。

The thickness of SUN-MODEST co-extruded layer is about 0.8mm. The embossed surface could be optional with wood grain and pitted grain. The surface is not polished, the back side with grooves and brushed finishing. There will some plastic sense, but with very high cost-effective.

圆孔共挤地板 Co-extrusion Round Hollow Decking



140x25mm



140x25mm

140x25mm双面带槽

140x30mm



150x40mm

150x50mm

实心共挤地板 Co-extrusion Solid Decking



140x20mm



140x20mm

140x23mm

140x25mm



140x30mm

140x40

树心纹理 Tree heart texture



麻砂纹理 Hemp sand texture



色彩

Color



Rosewood
紫檀色



Teak
柚木



Dark Grey
深灰



Coffee Brown
浅咖啡



Light Grey
浅灰



Antique
古木

乐致
系列

SUN-EXTEND SERIES



乐致系列共挤塑木地板采用先进的挤出成型技术生产而成，塑木芯层表面均匀而牢固的包裹着高耐磨耐候的共挤层。采用这种新技术生产的共挤塑木地板，除了保留着传统塑木的防霉，防虫和其他物理性能优点外，还具有更强的耐磨、抗刮和耐候性能，更加美观耐用，适用于高档的户外园林景观工程。

The core layer of plastic wood is evenly and firmly covered with a highly wear-resistant and weather-resistant co-extruded layer. The co-extruded plastic wood flooring produced by this new technology, in addition to retaining the traditional mold, insect and other physical advantages of plastic wood, but also has stronger wear resistance, scratch resistance and weather resistance performance, more beautiful and durable, suitable for high-end outdoor landscape projects.



色彩

Color selection

共挤圆孔地板

Co-extrusion Round Hollow Decking



138*23mm



140*23mm



143*22mm

共挤实心地板

Co-extrusion Solid Decking



140*20mm



143*22mm



150*23mm

共挤包边条

Co-extrusion Side Cover



50*50mm



Maple

枫木色



Teak

柚木色



Walnut

胡桃色



Oak

橡木色



Mahogany

红木色



Rosewood

紫檀色



Light Grey

浅灰色




Silver Grey

银灰色

一代 塑木地板

CLASSIC WPC DECKING

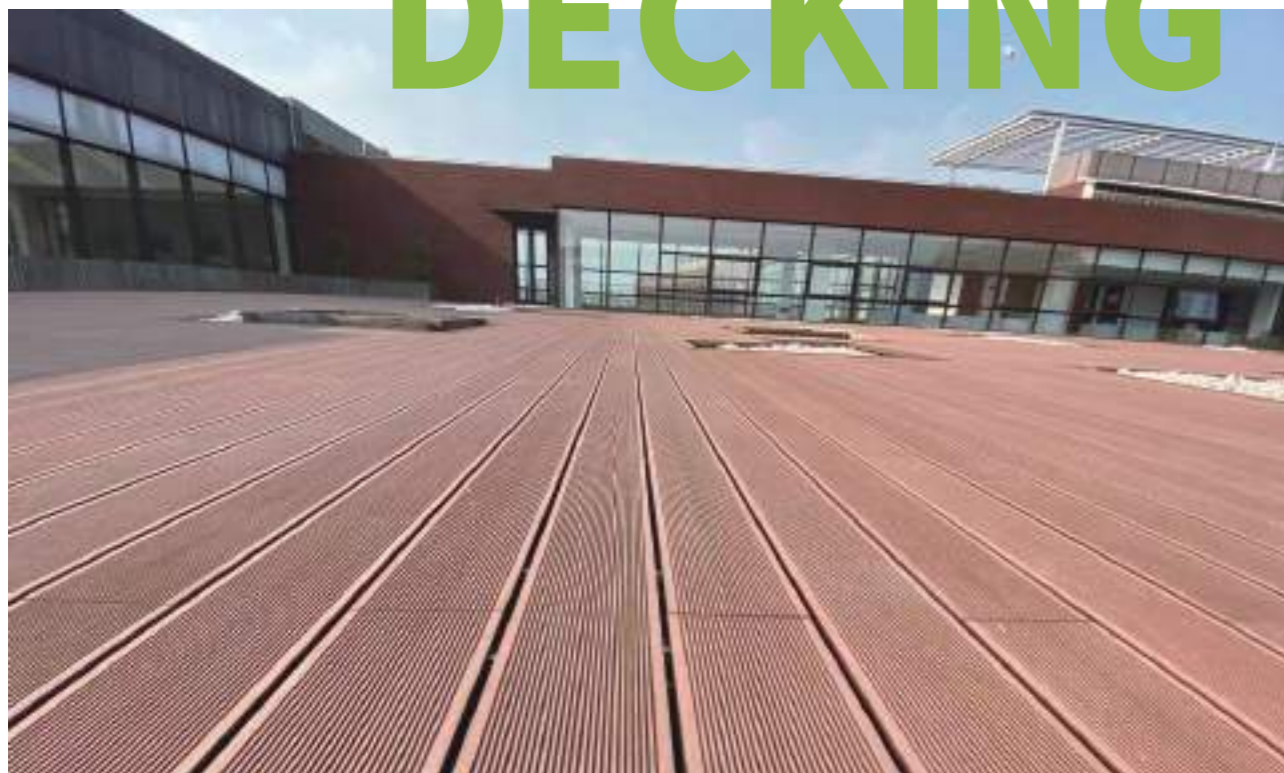

“胜澜木”塑木地板是一种主要由木纤维和热塑性高分子材料 (PE塑料) 制成的高科技绿色环保型材, 既保持了木地板的亲水性, 同时具有良好的户外使用性能, 在很多场合替代塑料和木材, 具有明显的优点: 防潮防腐, 防霉防蛀, 不开裂, 不翘曲, 经久耐用, 安装简便。

WPC decking is an alternative decking product made from wood plastic composites, a unique composition that replicates wood without the maintenance of traditional timber decking. Commonly used by builders, landscapers, and maintenance companies, this form of decking is ideal for commercial and residential use as well as schools and other public spaces.

产品特点

FEATURES


经久耐用免维护

防虫蛀, 不龟裂, 不膨胀, 不变形, 不需要维修和养护, 便于清洁, 节省后期维修和保养费用。



防水防滑

解决木质产品吸水受潮容易腐烂和膨胀变形的问题, 可以使用到传统木质产品不能应用的环境中; 表面小沟槽设计, 防水防滑。



物理性能好

强度高, 硬度高, 耐老化, 耐腐蚀, 防静电和紫外线, 适应温度范围75°C至零下40°C。



应用广泛

市政公园, 小区广场, 泳池平台, 栈道, 园林景观, 别墅庭院等户外场所。



Value

The strength and durability of our composite boards result in a deck with a significantly longer lifespan than could be expected from traditional timber decking. The low maintenance design doesn't require regular sanding, sealing, treating or board replacements, meaning annual upkeep costs are low.

Durability

Composite decking is designed for maximum durability and won't crack, split or warp in the way that traditional timber deck boards do. Low maintenance, requires little care, no more staining or sealants.

High Performance


UV, Dent and Mold resistant. The WPC deck boards have no splinters or rough edges, making them ideal for homes with bare feet and pets, and the weather-resistant construction protects them from extremes of rain or snow.

Widely Application

The WPC decking can replace wooden decking and wood preservative decking to be long-time used in outdoor, port, dock, seaside, wetlands, water platform, park roads and many other landscaping and municipal projects.


色彩

Color selection

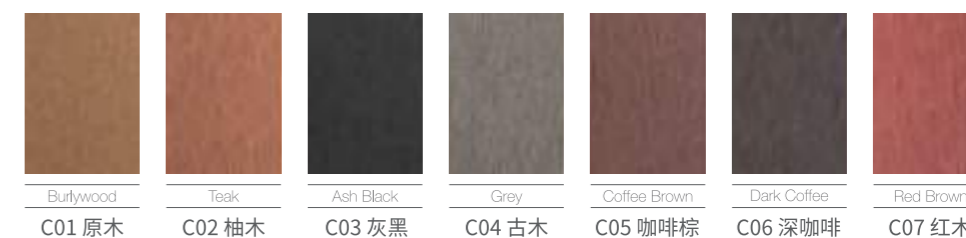

表面处理

Surface treatment

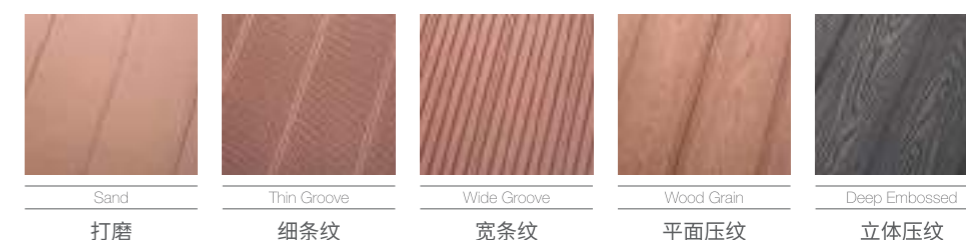

一代方孔塑木地板

Square Hollow Decking



145x20mm



146x24mm



140x25mm



150x25mm



140x30mm



140x40mm



150x40mm



150x50mm

一代圆孔塑木地板

Round Hollow Decking



148x23.5mm



140x24mm



140x25mm



150x30mm



140x40mm



150x40mm



150x48mm

一代实心塑木地板

Solid WPC Decking



100x25mm



140x20mm



140x24mm



140x25mm



140x30mm



140x39mm




150x40mm



150x50mm

塑木地板配件

WPC Decking Accessories



40x25mm
工字形龙骨



40x40mm
工字形龙骨



50x50mm
工字型龙骨



50x50mm
包边条



Setscrew
美固钉



不锈钢自攻螺丝



不锈钢钻尾螺丝



镀锌钻尾螺丝



不锈钢扣件
Stainless
Steel Clip



美固钉
Setscrew



塑料卡扣
Plastic Clip

立体
压纹系列

3D EMBOSSED WPC DECKING



塑木制品表面压花压纹已成为塑木制品生产的流行趋势，压纹处理后的塑木制品更具美观性和实用性。随着塑木制品运用的领域更加广泛，塑木压纹使得木塑制品不再单调，使其表面更加美观，更能起到板材的装饰作用。

3D embossed composite decking uses the latest pressing rollers and sanding methods to present the most perfect 3D wood grain texture on the composite decking, and take advantage of the excellent properties of composite wood and unique surface treatments to make your life more natural ,casual and more beautiful.

Embossed decking boards type of products environmental protection, easy to install, very low maintenance requirements. The unique composite wood formula looks and feels like natural wood, but has more durable deck durability. Innovative underground fixation systems mean that no nails or screws need to pass through the deck itself to help you maintain a uniform, barefoot friendly deck.

方孔立体压纹地板

3D Embossed Square Hollow WPC Decking



146x20mm



140x25mm



150x25mm

实心立体压纹地板

3D Embossed Solid WPC Decking



140x20mm



140x23mm



140x25mm



155x30mm

圆孔立体压纹地板

3D Embossed Round Hollow WPC Decking



140x25mm



146x24mm



148x23mm



150x25mm



196x26mm

色彩

Color Selection



Black 黑色 Teak 柚木色 Coffee Brown 咖啡棕 Dark Coffee 深咖啡 Burly Wood 原木色 Red Brown 红木色 Ancient Wood 古木色

更多纹理

More Textures



Wood Grain 树心纹 Water Ripples 水波纹 Vertical Knife 刀砍纹 Ancient Boat Wood 老船木 Cloud Crest 云峰纹

塑木
围栏

WPC FENCE



随着现代生活对空间归属感和私密性的重视，户外塑木围栏系列产品越来越受到人们的喜欢，广泛应用于私人庭院，别墅，高档社区等。

铁艺围栏容易生锈，贴瓷砖千篇一律，防腐木容易腐烂、发霉，同时需要定期维护保养。塑木围栏克服了天然木材的不足，是作为户外围栏的绝佳选择。塑木围栏巧妙利用塑木板材和铝合金型材以达到最优的结构性能，款式上灵动多变，成为一道道靓丽的风景。

Whether injecting new life into the home garden or finally giving commercial spaces the love they need, WPC Fence should be at the very top of your agenda.

WPC Fence can turn your vision into a reality, giving your outside spaces the beauty and function needed for years of happiness.

Our environmental WPC fence products mainly using recycled wood fiber and high-density polyethylene plastic, which combine with the advantages of wood and plastic, can use a long time for outdoors, no maintenance, no painting or staining. Compared with the traditional wooden fence, our product is more durable and to let you relax and enjoy your time in outdoor. We can provide the completed fence system to help you easily build the durable and beautiful outdoor space which including all accessories, installation guides, and maintenance guides.



半封闭式

兼顾隔断及户外景观需求



全封闭式


私密性强，拼接强度大



全隔断式

透视风景，隔离私人空间



铝合金立柱
Post in aluminum

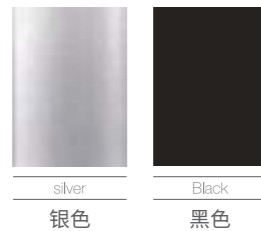

银色

黑色

塑木立柱
Post in wpc

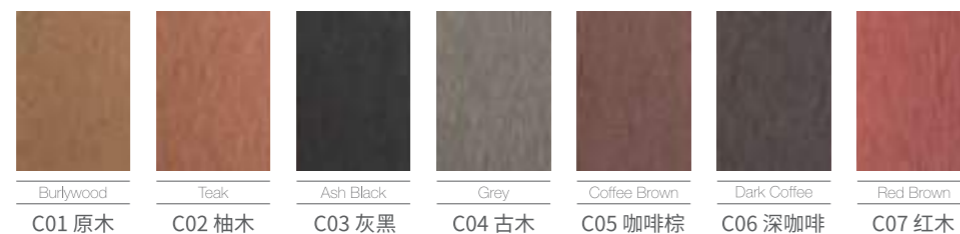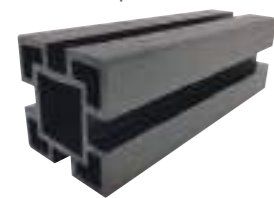

Burlywood
C01 原木

Teak
C02 柚木


Ash Black
C03 灰黑

Grey
C04 古木

Coffee Brown
C05 咖啡棕

Dark Coffee
C06 深咖啡

Red Brown
C07 红木

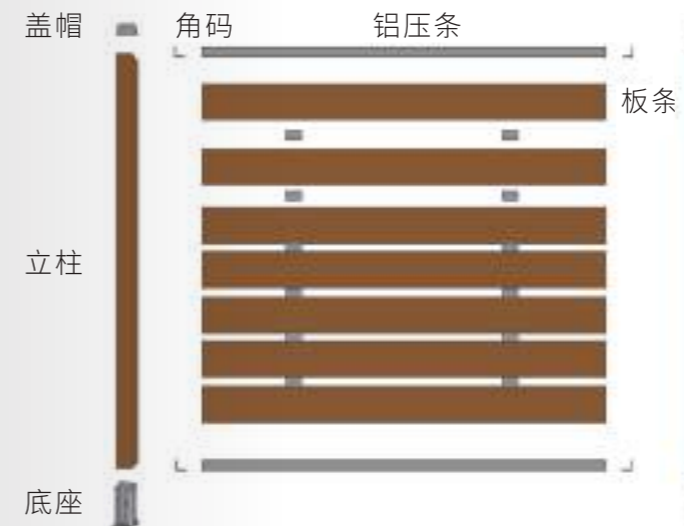

塑木栏杆 WPC RAILING

塑木栏杆既有自然的木制纹理和良好的机械物理强度,又具有优良的抗老化、抗UV性能,再配合以合理的力学结构提高产品的抗变形能力,为园林构建美轮美奂的建筑提供优质的材料。

Combining the elegance of natural wood and the durability of composites, WPC Railings are extraordinarily defiant to deterioration from effects of rigorous weathering. Our profiles and colors open up dimensions for design in many applications, replacing other materials that need regular maintenance. With high UV tolerance, these profiles are crack & splinter proof, requiring no regular painting or surface sealers to retain original aesthetics, making them the ideal for railing applications.



塑木护栏款式

WPC RAILING
MODELS



RL-01



RL-02



RL-03



RL-04




RL-05



RL-06



RL-07

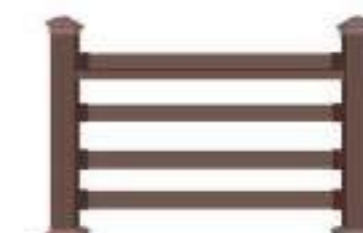

RL-08



RL-09



塑木 栅栏 WPC FENCE

塑木栏杆-立柱


RAILING POST



90×90mm 100×100mm 120×120mm 150×150mm 200×200mm

塑木栏杆-横梁

RAILING BEAM

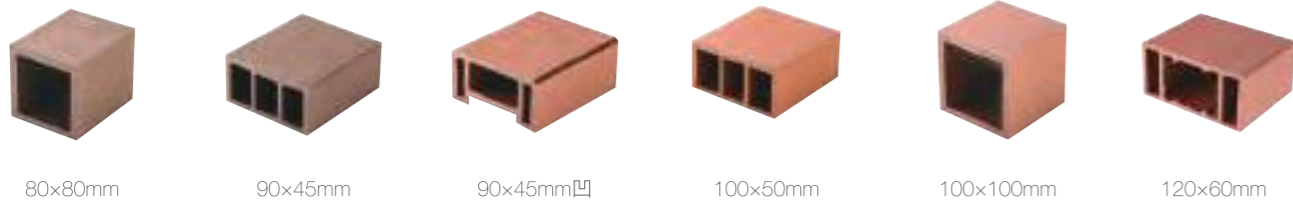

80×80mm 90×45mm 90×45mm凹 100×50mm 100×100mm 120×60mm

塑木栏杆-方通

RAILING COLUMN



50×50mm 60×40mm 60×60mm 70×50mm



塑木栅栏款式

WPC FENCE MODELS



FN-01 FN-02 FN-03 FN-04

配件

ACCESSORIES



50×50小方块 60×40小方块 不锈钢角码 常规套筒 盖帽和柱围 膨胀螺栓 万向套筒 预埋件

二代共挤
塑木栏杆

CO-EXTRUSION WPC RAILING



塑木芯层
WPC CORE



进口高分子材料保护层
Polymer Protective Layer

共挤塑木栏杆采用行业内最先进的挤出成型技术，表面均匀而牢固地包覆着共挤层。采用这种新技术生产塑木栏杆，除了保留着传统塑木的防霉、防虫和其它物理性能优点外，还具有更强的耐磨、抗刮、抗污和耐候性能，更加美观耐用，适用于高档的户外园林景观工程、建筑模板、别墅、庭院护栏围挡等。

Coextruded plastic wood railing adopts the industry's most advanced extrusion molding technology, the surface is uniformly and firmly covered with co-extruded layer. This new technology is used to produce plastic wood railing, in addition to retaining the traditional plastic wood mold, insect and other physical properties, but also has stronger wear resistance, scratch resistance, stain resistance and weather resistance, more beautiful and durable, suitable for high-end outdoor landscape projects, construction templates, villas, courtyard fence, etc.

产品规格

Product Specifications



共挤立柱 120x120mm



共挤方通 90x45mm



共挤方通 50x50mm

WPC WALL PANEL



塑木墙板格栅系列产品,能有效降低太阳直射,降低能耗,防止眩光污染,提升室温舒适度。拥有丰富的规格及色彩选择,贴近原木的温润质感,材质轻巧易装。

WPC Wall Panel, wood-like and natural surface wall, close to nature, close to the wood, but superior to wood in split and rot resistance. Exterior cladding has the potential to make the building look completely refreshed. With WPC cladding you can make your outbuildings blend into your garden or make any domestic or commercial property stand out with a contemporary makeover.

户外塑木外墙板

Outdoor WPC Wall Panel



148x21mm



156x21mm

平面压纹

Wood-grain surface



148x21mm



156x21mm

立体压纹

3D Embossed Surface



148x21mm



156x21mm

二代共挤墙板

Co-extrusion WPC Wall Panel

156*21mm

拉丝纹效果



树心纹效果



WPC WALL CLADDING



塑木长城板是一种木塑材质的新型外墙装饰材料,该产品具有表面立体感强,耐候性好,环保无甲醛等特点,能有效防止眩光污染,降低能耗,广泛应用于围墙栅栏、外墙饰板、天花吊顶、招牌门头、庭院背景等各类户外墙面装饰场景。

Plastic Wood Wall Cladding is a new type of exterior wall decoration material made of wood plastic, which has the characteristics of strong three-dimensional surface, good weather resistance, environmental protection and no formaldehyde, etc. It can effectively prevent glare pollution and reduce energy consumption, and is widely used in various outdoor wall decoration scenes such as fence, exterior wall trim, ceiling ceiling, signboard doorway, courtyard background, etc.

二代共挤塑木长城板

Co-extrusion wpc wall cladding



169x26mm



219x26mm

常规色彩

General colors



White
白色



Maple
枫木色



Mahogany
红木色



Light Grey
浅灰色



Oak
橡木色



Silver Grey
银灰色



Teak
柚木色



Walnut
紫檀色

一代塑木长城板

Wpc wall cladding



167x29mm



188x20mm



219x26mm

常规色彩



WPC PERGOLA




塑木凉亭、廊架、花架等园林景观产品,采用植筋浇筑混凝土的方式加固,充分发挥塑木材料防水,耐晒,耐酸碱,阻燃等性能优势,外观精致,木纹图案丰富,仿木效果逼真,具有良好的视觉效果。

Outdoor WPC pergola is Anti-uv, longlife, lightweight, widely used in garden, swimming pool, school, park, lawn, dock, balcony, playground, corridor, hotel, glorielte, gazebo, boardwalk etc.WPC Pergola usually do not need steel pipe inside to support, so it can save your cost for using less steel pipe into.




常用型材规格

SPECIFICATION FOR PERGOLA



150x60mm



160x80mm



200x80mm



150x150mm



200x200mm

配件

ACCESSORIES



穿心螺丝



盖帽和柱围



封头



膨胀螺丝



四孔角码



预埋铁

塑木花箱 / 塑木凉亭

WPC FLOWER BOX & WPC PAVILION




DIY 地板

DIY WPC TILE




DIY地板纹理美观, 造型新颖, 防晒, 防雨, 防水, 防腐, 防蛀, 防菌等综合性能好, 硬度、耐磨性也有出色的表现, 提供个性化的定制规格生产, 满足客户的多元化需求。


WPC interlock deck tile have various styles and easy installations. It's applied for home garden, balcony, bathroom and kitchen floor covering, in our belief it represents an environmentally friendly alternative to natural wood, which has the durability of plastic.

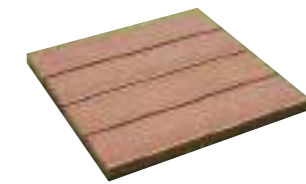


D01

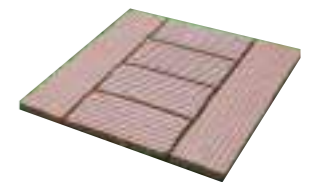


D02

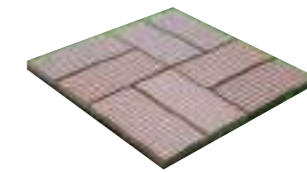


D03

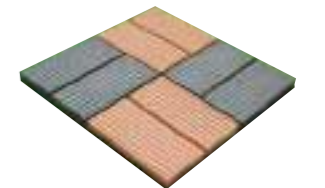

D04

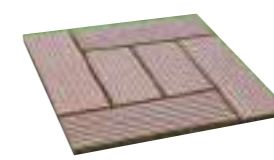

D05

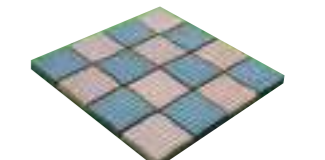

D06

安装说明

INSTALLATION GUIDE

“胜澜木”除提供型材之外
还提供配套解决方案、安装指导、项目设计施工


In addition to offering WPC material, "SUNLIKE" also provides all-in-one solution like project design and installation guidance.

塑木地板安装 WPC Decking Installation

01 施工前准备


- 1、确保施工现场的基层地面平整，基面高度差控制在10毫米以内。
- 2、龙骨端部对接接缝需留10mm左右的间距，便于排水，同时要做到龙骨排与排之间的端部接缝错开，不要在一条直线上。龙骨间距允许误差<10mm，平整度<3mm，与墙面间的伸缩缝为8-10mm。

02 施工前准备

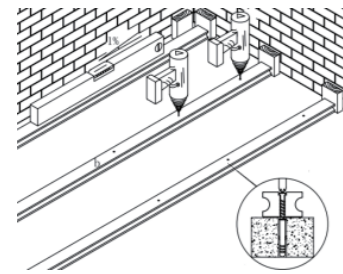


- 1、塑木地板必须有龙骨作依托，以保持良好的通风及排水。
- 2、将塑木地板均匀排列于混凝土基面上，建议每根龙骨间距为30-35CM。
- 3、龙骨端部对接接缝需留10mm左右的间距，便于排水，同时要做到龙骨排与排之间的端部接缝错开，不要在一条直线上。龙骨间距允许误差<10mm，平整度<3mm，与墙面间的伸缩缝为5-8mm。
- 4、用电钻在龙骨上引孔，引孔直径不能小于固定龙骨用的膨胀螺丝尺寸，引孔的间距控制在40-50CM内。
- 5、将膨胀螺丝旋入钻好的孔内，将龙骨固定在混凝土地面上，钉头应全部旋入龙骨内，不得裸露在外，以免导致地板铺装后板面不平整。

03 固定第一块地板

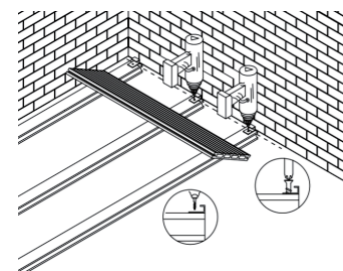


- 1、在每块塑木地板的左右两侧均有扣件槽；
- 2、在龙骨起始处，确认起始扣件位置，使用电钻将不锈钢自攻螺丝旋入起始扣件上的孔内，将起始扣件固定在龙骨上；
- 3、将起始扣件扣入第一块地板，将第一块地板固定在龙骨上。


04 后续地板的安装

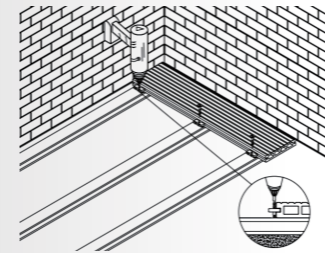


- 1、将不锈钢扣件定位于塑木地板与龙骨交叉处，并扣入之前已安装好的塑木地板扣件槽内，使用电钻将不锈钢扣件旋入不锈钢扣件的孔内，将不锈钢扣件固定在龙骨上；

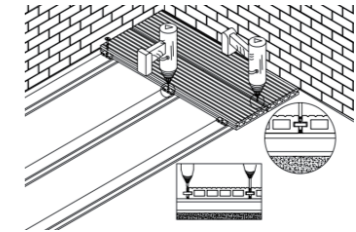

- 2、将后续塑木地板于之前已安装好的塑木地板对齐，使用皮制榔头，将后续塑木地板轻轻敲入，使不锈钢扣件扣入塑木地板槽内，将其固定于龙骨上。



- 3、塑木地板与建筑物墙体需至少保留5mm的缝隙。




- 5、如塑木地板需露出龙骨外，为保证地板强度，露出部分不得超过5厘米。




- 4、塑木地板接缝处保留至少5mm的伸缩缝。

05 塑木地板交接处需使用两根龙骨固定




- 1、塑木地板交接处需使用两根龙骨，并使用不锈钢扣件，将交接处的两根塑木地板分别固定于两根龙骨之上。

06 侧封板(封边条)的安装



- 1、在塑木地板安装完成后安装侧封板(封边条)



- 2、如使用封边条，封边条切口成45度，每隔30-40厘米打一个不锈钢自攻螺丝。

安装说明

INSTALLATION GUIDE

“胜澜木”除提供型材之外
还提供配套解决方案、安装指导、项目设计施工

In addition to offering WPC material, "SUNLIKE" also provides all-in-one solution like project design and installation guidance.

塑木外墙板安装

WPC Wall Cladding Installation



01

在塑木外墙板安装时，先使用美国钉将塑木龙骨（或相应尺寸镀锌方管）固定在墙面上，龙骨间距一般不超过35cm；

02

将塑木外墙板用不锈钢卡扣（或自攻螺丝）固定在龙骨上，塑木外墙板之前需留3-5mm的缝隙，截面间距推荐为5mm，以防止引起塑木材料的热胀冷缩造成隆起；

03

安装自攻螺丝时，应先在相应位置钻孔，然后再拧紧自攻螺丝；同时为增加自攻螺丝的握钉力，钻孔的直径应小于螺丝直径的3/4；

04


如用不锈钢卡扣连接时，在具体施工中应当用橡皮锤对塑木外墙板进行轻轻敲打，保证间隙的均匀和整个施工面的美观；

05

施工完毕后，在窗户、墙角等地方，可使用封边条进行包边美化，防止外墙板划伤。

塑木栏杆安装

WPC Railing Installation

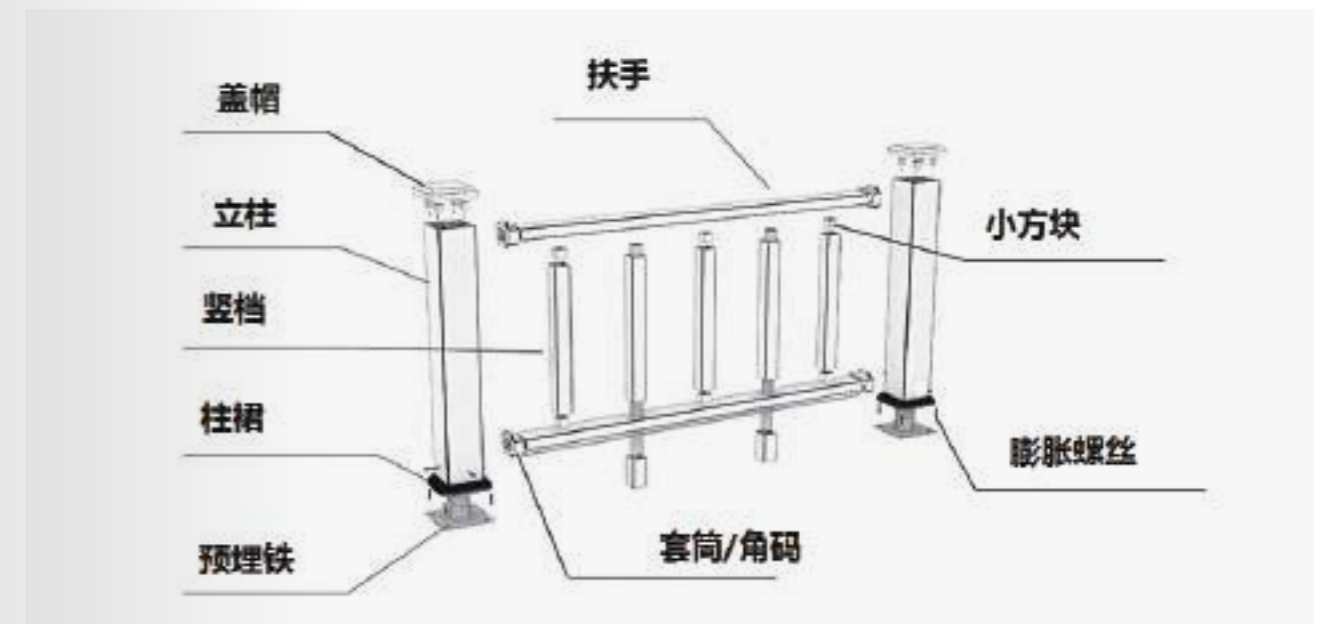

01

将塑木立柱专用固定件用膨胀螺丝固定在混凝土地坪上（膨胀螺丝长度由施工地点的混凝土地坪厚度与质量决定），首先将立柱套入立柱专业固定件上面，一般立柱之间距离为1.5米左右，具体距离由当地的实际情况或是设计方案决定，包括人流量及安装地点的周边环境等。

02

先准备好规定长度的扶手与方管，采用方管连接件来进行连接，首先在扶手相应位置固定好方管连接件，再将准备好的方管套入连接件内，最后，装好另一根扶手，方管之间距离由具体情况而定，参考距离为间距为100-200mm，扶手与扶手之间距离由具体情况而定，建议为800—1000mm

03

将安装好的扶手与立柱通过扶手连接件进行安装，安装时，扶手与立柱之间不能紧密相连，应该每边预留3—5mm的伸缩缝，安装高度由具体情况而定

04

将盖帽与立柱固定，盖帽可采用塑木材料制作的盖帽，或是注塑盖帽，具体由客户自行选择

